



P60E

Modular electric oven for pizzeria

COMPOSITION WITH 1 BAKING CHAMBER



OPTIONS AND ACCESSORIES (WITH SURCHARGE)

- ☐ Leavening prover on wheels, height 800mm
- ☐ Leavening prover on wheels, height 600mm
- ☐ Support with wheels, height 600mm
- ☐ Support with wheels, height 800mm
- ☐ Support with wheels, height 950mm
- ☐ Additional tray holder guides for compartment and support
- ☐ Spacer element height 300mm
- ☐ Suction hood

(WITHOUT SURCHARGE)

- ☐ Front vapour collection hood in stainless steel sheet

EXTERNAL CONSTRUCTION

- ☐ Structure made in folded stainless steel
- ☐ Side panels in pre-painted sheet metal
- ☐ Stainless steel hood with aluminised steel top cover
- ☐ Front vapour collection hood in HT coating steel sheet
- ☐ Steam duct in stainless steel plate
- ☐ Stainless steel door with bottom hinge and spring balance
- ☐ Tempered glass element
- ☐ Handles in thermoplastic material
- ☐ Control panel on front right hand side

INTERNAL CONSTRUCTION

- ☐ Refractory brick baking surface
- ☐ Aluminated steel top and side structure
- ☐ Rock wool heat insulation

FUNCTIONING

- ☐ Heated by armoured heating elements
- ☐ Electronic temperature management with independent adjustment of ceiling and floor
- ☐ Maximum temperatura reached 450°C
- ☐ Continuous temperature monitoring with thermocouple
- ☐ Vapour ducting using manual butterfly valve

STANDARD EQUIPMENT

- ☐ Lighting with halogen lamp
- ☐ Timer
- ☐ Economiser
- ☐ Independent maximum temperature safety device
- ☐ 20 customisable programs



MORETTI FORNI S.P.A.

www.morettiforni.com

info@morettiforni.com

Via A.Meucci, 4 - 61037 Mondolfo (PU) ITALIA


Tel. +39.0721.96161 - Fax +39.0721.9616299



P60E

1 baking chamber height 18cm

(assembled with 950mm)

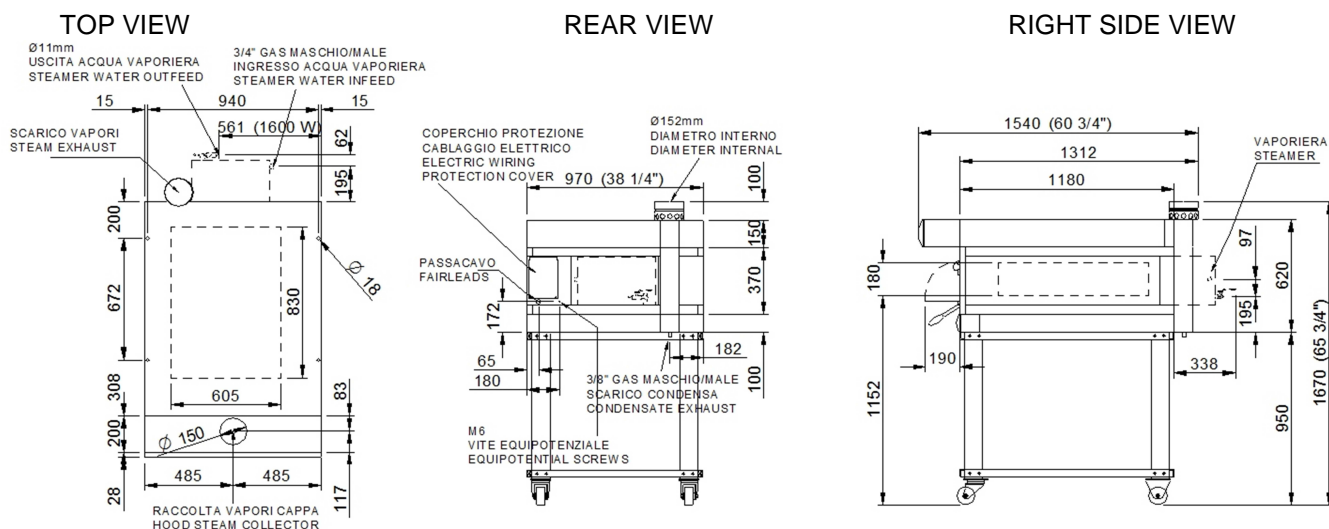

Note: The dimensions indicated in the views are in millimeters. Steamer for Bakery only.

SPECIFICATIONS

The appliance comprises one baking element and an optional Leavening prover or support. The oven baking surface is made of refractory, allowing perfect heat distribution over the whole surface and making this oven particularly suitable for baking pizza directly or on trays. Temperature adjustment is electronic, with independent control of the ceiling and floor heating elements. The oven door is hinged at the bottom, with a tempered glass window to check the state of the product while it is baking. The support comprises a painted metal structure, whereas the Leavening prover has a stainless steel structure and is fitted with a heating thermostat. The Leavening prover can reach a maximum temperature of 65°C, whereas the maximum temperature of the baking chamber is 450°C

All the data provided below refer to the configuration with 1 baking chamber

DIMENSIONS

External height	720mm
External depth	1541mm
External width	970mm
Weight	177kg
Baking surface	0,5m ²

SHIPPING INFORMATION

Packed in wooden crate	
Height	870mm
Depth	1741mm
Width	1170mm
Weight	(177+50)kg

FEEDING AND POWER

<i>Standard feeding</i>	
A.C. V400 3N	
<i>Feeding on request</i>	
A.C. V230 3	
Frequency	50/60Hz
Max power	7,9kW
Average power cons	4kWh
Connecting cable	
type H07RN-F	
5x4mm ² (V400 3N)	
4x6mm ² (V230 3)	
Power supply (optional Leavening prover)	
A.C. V230 1N 50/60 Hz	
Max power	1,5kW
Average power cons	0,8kWh
Conn. Cable type	H07RN-F
3x1,5mm ²	

TOTAL BAKING CAPACITY

When combined with Leavening prover or support:	
Tray (600x400)mm	2
Max height	1820mm
Max weight	(251+60)kg
Pizza diameter 300mm	4
Pizza diameter 450mm	1

* This value is subject to variation according to the way in which the equipment is used

- **NOTE:** MORETTI FORNI S.P.A. reserves the right to modify the characteristics of the products illustrated in this publication without prior notice